



ALTERNATOR PRO28S C/4

three-phase brushless synchronous alternator with AVR - 4 poles

Technical Data Sheet

PRO28S C/4

COMMON DATA

Rated Power at 50Hz	kVA	225
Rated Power at 60Hz	kVA	270
Rated Power Factor		0.8
Nominal Temperature	°C	40
Control System		self excited
Execution		brushless
Regulation Type		AVR
Insulation Class		H
Protection		IP23
Maximum Overspeed	rpm	2250
Overload		110% of rated power for one hour in a cycle of 6 hours
Air Flow Requirement	m ³ /min	32.5 at 50Hz 39 at 60Hz
R.F.I. Suppression		Standard EN55011

REGULATION DATA

AVR	HVR30	\
Sensing	three-phase	\
Voltage Regulation	±1%	
Sustained Short Circuit		> 300% of rated current

WINDING DATA

Stator Winding		Double layer with auxiliary winding
Rotor Winding		with damping cage
Winding Pitch		2/3
Number of Leads of Stator		12
Stator Winding Resistance		0.0093 at 20°C
Rotor Winding Resistance		2.1 at 20°C
Exciter Stator Resistance		15 at 20°C
Exciter Rotor Resistance		0.25 at 20°C
THD at full load		<3%
THD at no load		<3%
Excitation at no load	A _{dc}	0.6
Excitation at full load	A _{dc}	2.36

STANDARD

References	EN60034-1 ISO8528-3 EN55011
------------	-----------------------------

PRO28S C/4

ELECTRICAL DATA

Frequency		50Hz - 1500rpm				60Hz - 1800rpm			
Voltage Series Star	V	380/220	400/230	415/240	440/254	415/240	440/254	460/266	480/277
Rated Power in Class H (125°C/40°C)	kVA	225	225	225	215	260	270	270	270
	kW	180	180	180	172	208	216	216	216
Rated Power in Class F (105°C/40°C)	kVA	200	200	200	190	225	240	240	240
	kW	160	160	160	152	180	192	192	192
Rated Power Standby (150°C/40°C)	kVA	255	255	255	245	290	305	305	305
	kW	204	204	204	196	232	244	244	244
Rated Power Standby (163°C/27°C)	kVA	265	265	265	250	295	315	315	315
	kW	212	212	212	200	236	252	252	252

EFFICIENCY IN CL. H

4/4		92.1%						92.7%
3/4		92.5%						93.0%
2/4		91.2%						91.6%
1/4		89.7%						90.4%

REACTANCES AND TIME CONSTANTS

pcc			0.36						
X _d - dir. axis synchronous		398%	359%	334%	284%	462%	427%	391%	359%
X' _d - dir. axis transient		22.5%	20.3%	18.9%	16.0%	26.2%	24.2%	22.1%	20.3%
X'' _d - dir. axis subtransient		11.3%	10.2%	9.5%	8.1%	13.1%	12.1%	11.1%	10.2%
X _q - quad. axis reactance		253%	228%	212%	180%	294%	271%	248%	228%
T' _{do} - O.C. field time constant	1825ms								
T' _d - Transient time constant	113ms								
T'' _d - Sub-transient time constant	16ms								

MECHANICAL DATA

Bearing non drive end			6314-2RS-C3
Bearing drive end (B3/B14 form)			6316-2RS-C3
Weight of generator	in B2	kg	668
	in B3/B14	kg	679
	in B3/B9	kg	\

PRO28S C/4


MOMENT OF INERZIA

B3/B9	kg·m ²	\
SAE 7½	kg·m ²	\
SAE 8	kg·m ²	\
SAE 10	kg·m ²	\
SAE 11½	kg·m ²	2.902
SAE 14	kg·m ²	3.018
SAE 18	kg·m ²	\
B3/B14	kg·m ²	2.723

POWER VARIATION ACCORDING TO TEMPERATURE AND ALTITUDE


Altitude	Ambient temperature				
	25°C	40°C	45°C	50°C	55°C
< 1000m	1.09	1	0.96	0.93	0.91
1000m - 1500m	1.01	0.96	0.92	0.89	0.87
1500m - 2000m	0.96	0.91	0.87	0.84	0.83
2000m - 3000m	0.9	0.85	0.81	0.78	0.76

WIRING DIAGRAM

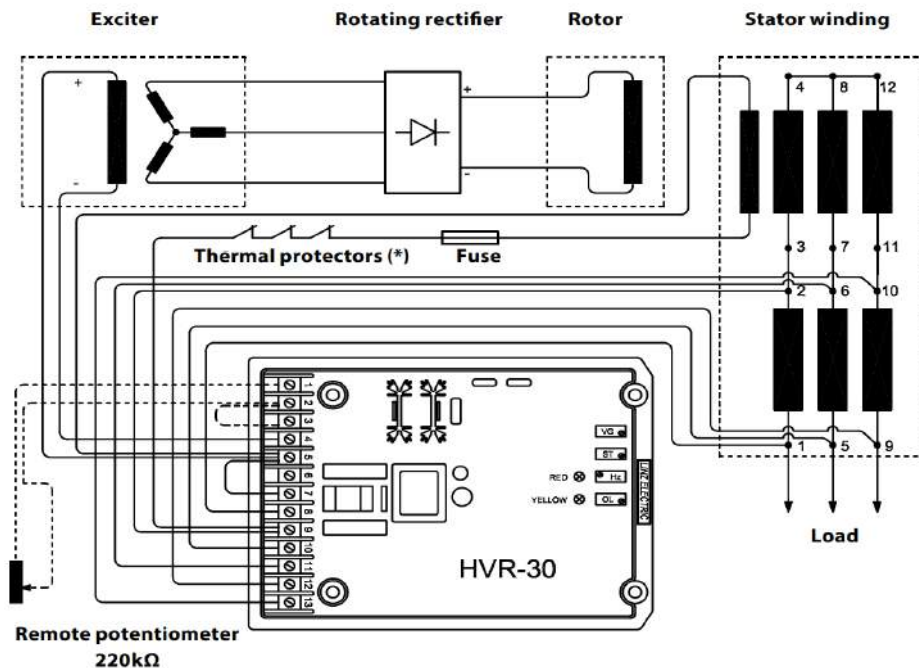


PRO28S C/4

TRANSIENT VOLTAGE VARIATION 50Hz

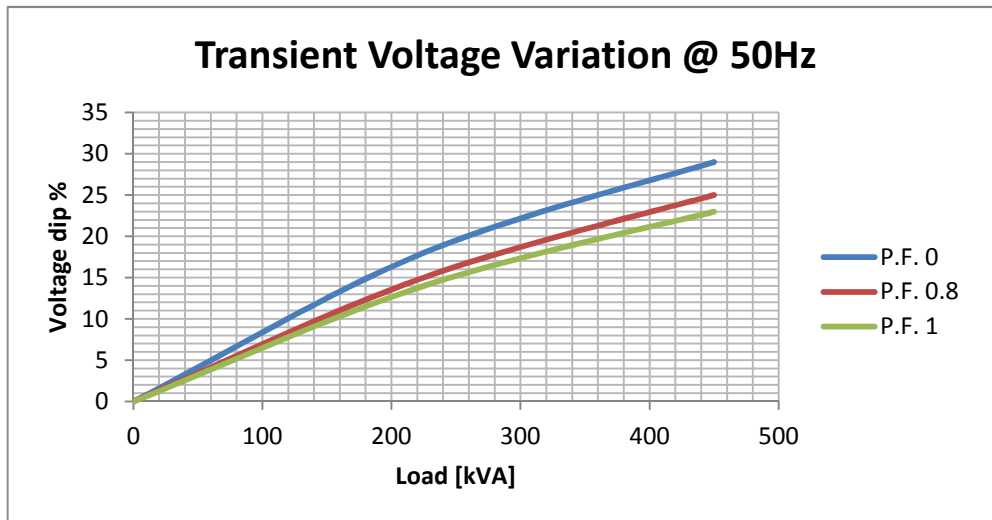


TRANSIENT VOLTAGE VARIATION 60Hz

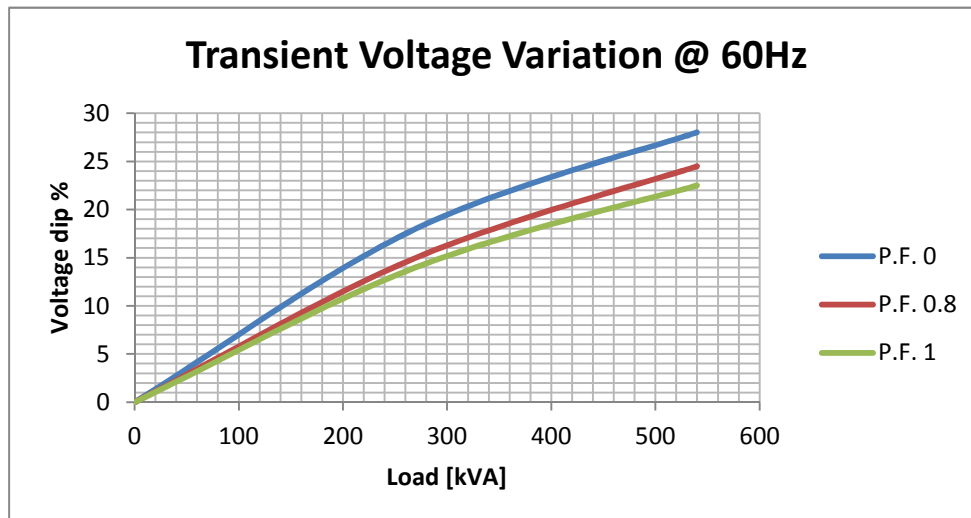


PRO28S C/4


EFFICIENCY 50Hz

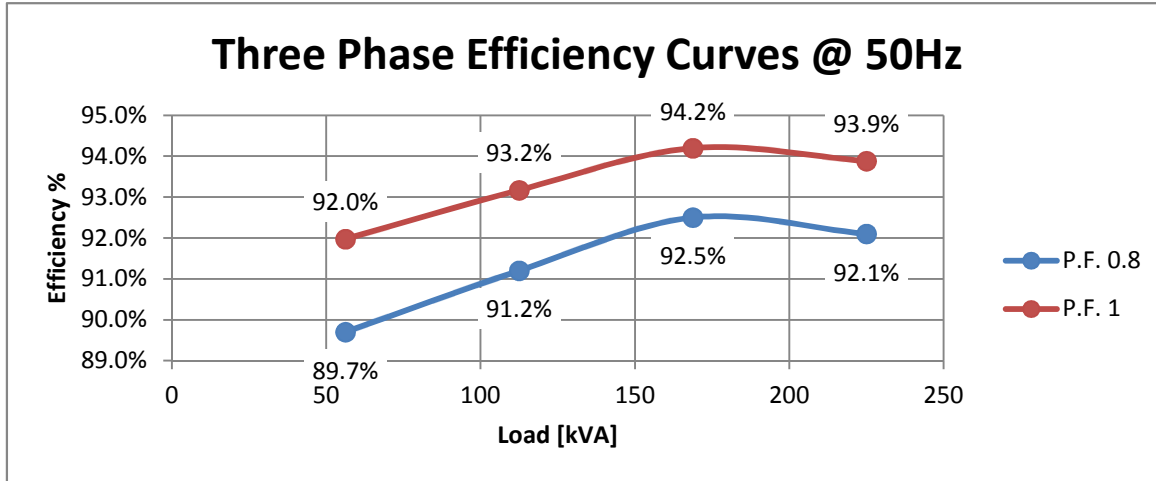


EFFICIENCY 60Hz

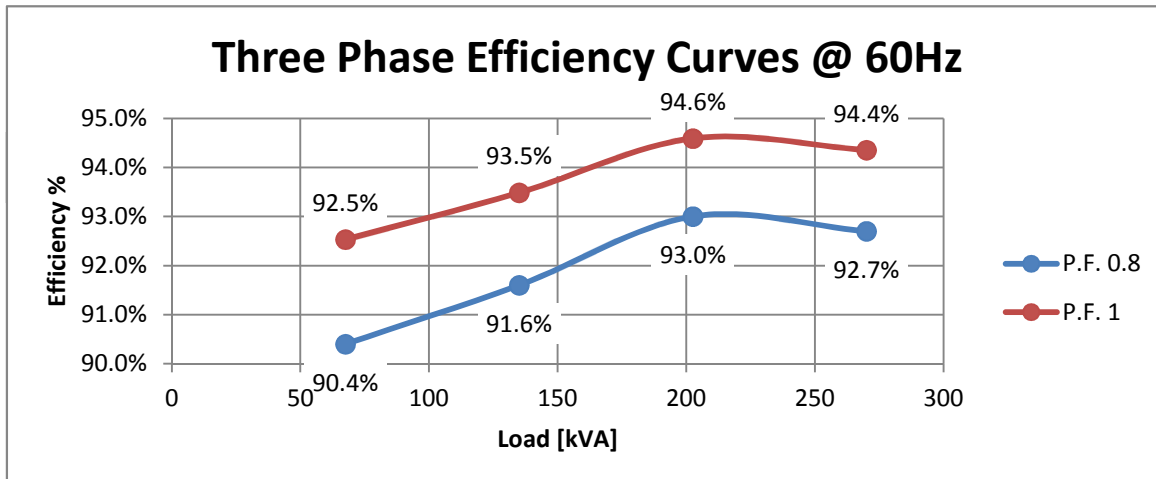

FORMA - FORM B3/B14

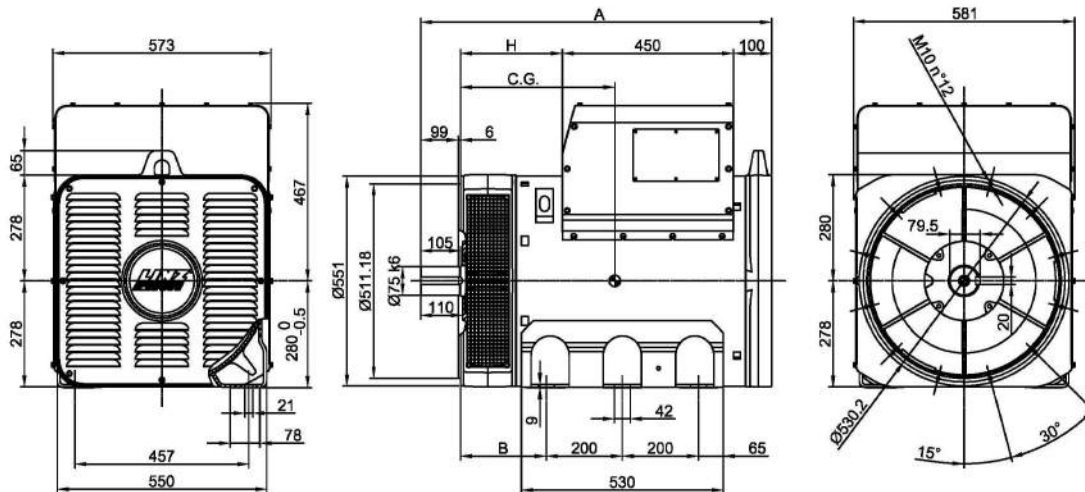

FORMA - FORM SAE

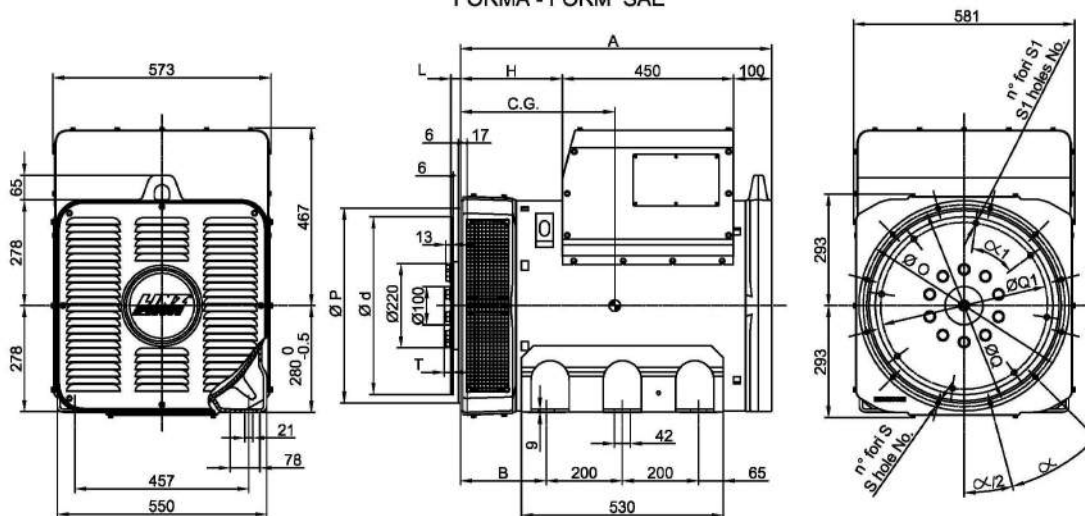

FORMA - FORM		A	B	H	TIPO - TYPE	C.G.
B3/B14	PRO 28S	922	225	267	PRO28S A/4	376
	PRO 28M	1072		417	PRO28S B/4	380
	PRO 28L	1137	325	482	PRO28S C/4	394
SAE	PRO 28S	817	225	267	PRO28S D/4	406
	PRO 28M	967		417	PRO28M E/4	452
	PRO 28L	1032	325	482	PRO28M F/4	480
					PRO28L G/4	513

SAE N.	FLANGIE - FLANGES - BRIDAS					
	Ø O	Ø P	Ø Q	n. fori holes No.	S	α
3	451	409.6	428.6	12	12	30°
2	490	447.68	466.7			
1	552	511.18	530.2			

SAE N.	GIUNTI A DISCO - COUPLING DISCS - JUNTAS A DISCOS						
	L	ϕ d	ϕ Q1	n. fori holes No.	S1	α 1°	T
11 1/2	39.6	352.42	333.37	8	10.5	45°	0
14	25.4	466.72	438.15	8	14	45°	17.3